



## EZ-RJ45® Cat 5E UTP Connector

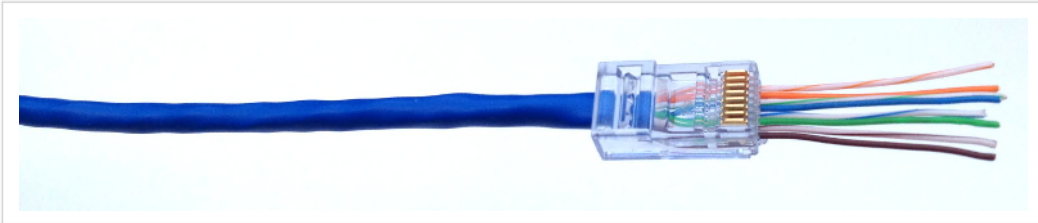

truLAN

### PART REFERENCE

RJ45EZU5

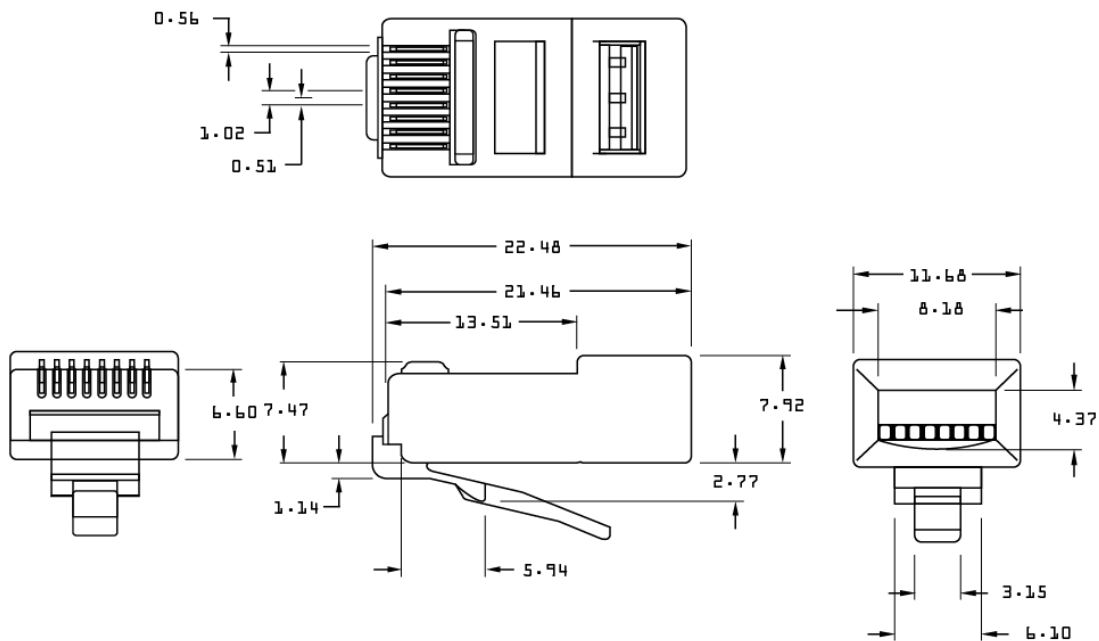

### SPECIFICATIONS

MAX CABLE OD	6.10MM
MAX OD OF INSULATED CONDUCTORS	0.94MM TO 1.04MM
PERFORMANCE	MEET OR EXCEEDS CATEGORY 5E TIA/EIA 568-B.2
TRANSMISSION SPEED	UP TO 1 Gbit
CONTACT PIN MATERIAL	PHOSPHOR BRONZE, 50 MICRO INCH SELECTIVE 24 CARAT HARD GOLD IN CONTACT AREA OVER 100 MICRO INCH MINIMUM NICKEL PLATE.
BODY MATERIAL	POLYCARBONATE
OPERATING TEMPERATURE	-40 TO +80°C
FLAME AUTO EXTINGUISH	94-V0
INSERTION/EXTRACTION	1000 CYCLES
CONTACT RESISTANCE	10 MILLIOHMS MAX.
CURRENT VOLTAGE	30 VAC/42 VDC AT 1.5 AMPS