

# CP-290

## HD/PC/DVI/HDMI to HDMI Scaler Box

*Operation Manual*



**CP-290**

## **Revision History**

<b><i>Version No</i></b>	<b><i>Date</i></b>	<b><i>Summary of Change</i></b>
<b>V1</b>	<b>20090106</b>	<b>Preliminary Release</b>

## **Precaution**

Failure to follow the precautions described below may cause damage to PC/DVI to HDMI Scaler Box and void the warranty.

- DO NOT open the case. Doing so will void the warranty. If you find problem with it, please return back to your retailer or seller who will assist you or provide you with solution.
- DO NOT use third-Party AC adapter or power cord. Doing so may damage PC/DVI to HDMI Scaler Box.
- DO NOT bump, jar or drop contents of the products as it may damage it and result in warranty void.
- DO NOT set any liquids or beverages on the drive as they may damage PC/DVI to HDMI Scaler Box.

# ***Table of Contents***

<b>1. Introduction.....</b>	<b>1</b>
<b>2. Application.....</b>	<b>1</b>
<b>3. Contents.....</b>	<b>1</b>
<b>4. System Require.....</b>	<b>1</b>
<b>5. Features.....</b>	<b>2</b>
<b>6. Operation Controls and Functions.....</b>	<b>2</b>
6.1 Front Panel .....	2
6.2 Rear Panel .....	3
<b>7. Specifications.....</b>	<b>3</b>
<b>8. Connection and Installation.....</b>	<b>4</b>
<b>9. Support Resolution.....</b>	<b>4</b>

## **1. Introduction**

This Scaler Box is design to display your PC/HD images on the LCDTV with better viewing image. It can upscale PC/DVI input sources to HDMI output for wide-range PC/HD resolutions; PC/DVI/HD/HDMI support XGA/UXGA/720p/1080p. This unit allows user to select a variety of output resolutions/format, color space and adjust for the best picture quality. Further, it also transfer sounds through HDMI for user to enjoy both HD images and sounds consistently.

## **2. Application**

- Individual home use
- Classroom presentation
- Meeting demonstration
- Gaming entertainment playing

## **3. Contents**

- HD/PC/DVI/HDMI to HDMI/DVI Scaler Box
- Power adaptor
- Operation Manual

## **4. System Require**


- PC/DVD/Blue Ray and LCD TV/Monitor.
- D-SUB/ 3RCA to D-SUB, DVI/HDMI to DVI-D cable for linking source input & image output to TV.
- Coaxial or audio phone jack cable for linking the digital or analog audio sounds.

## 5. Features

- HDMI 1.3, HDCP 1.1 and DVI 1.0 compliant.
- Support PC/HD resolution input: HDMI: 480p~1080p50/60  
DVI : VGA~WUXGA  
PC : VGA~WUXGA  
HD : 480i~1080p50/60Hz
- Scale PC/HD/DVI/HDMI resolutions to XGA/UXGA/720p/1080p resolutions.
- Support PC/HD&DVI/HDMI to HDMI output.
- Transfer L/R and coaxial sounds to HDMI.
- Input and output selection bottoms for easy and quick function chose.


## 6. Operation Controls and Functions

### 6.1 Front Panel

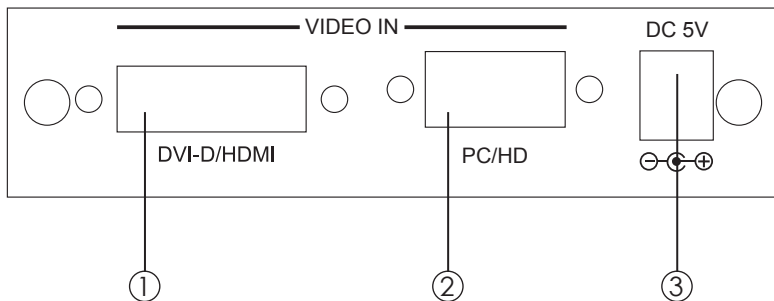

- ① DVI-D/HDMI: Connect the PC input DVI (29 pin) port to the DVI-D/HDMI output port of your HDMI source equipment such like PC.  
Resolution: VGA~ WUXGA ; 480p~1080p50/60  
**Note:** DVI-D input can only take Digital signal.  
*HDMI input 12bit, output 8 bit only.*
- ② PC/HD: Connect the PC input D-Sub (15-pin) port to the D-Sub output port of your source equipment such like PC or a D-Sub to 3RCA to your source equipment like DVD player.  
PC Resolution: VGA~ WUXGA  
Component Resolution: 480i~1080i, 1080P 50/60
- ③ Power: Plug the 5VDC power supply into the unit and connect the adaptor to AC wall outlet.  
**Note:** Output timing 1080p 50Hz may not be supported by some TV with input 576i/p@50, 720p50 and 1080i50.

## 6.1 Rear Panel

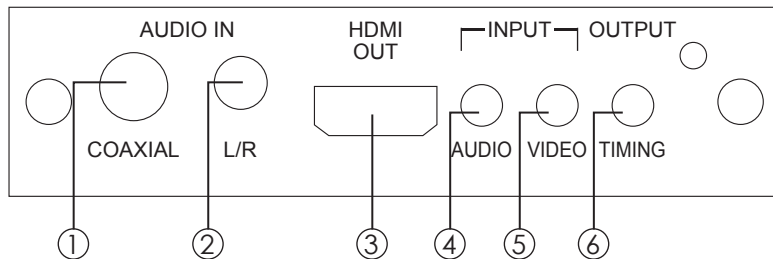


- ① Coaxial: Connect the coaxial audio cable from source device.
- ② L/R: Connect the L/R phone jack from the source device.
- ③ HDMI out: Connect the HDMI cable to LCD TV or Monitor.
- ④ Audio: input audio switching button for selecting coaxial or L/R audio signal. Simply push the button and the selection menu will display on the TV.
- ⑤ Video: input video switching button for selecting DVI or PC/HD video signal. Simply push the button and the selection menu will display on the TV.
- ⑥ Output Timing: output resolution selectable on 720p / 1080p / XGA / UXGA. Simply push the button and the selection menu will display on the TV.

**Note:** A. Only when HDMI signal is send the selection of audio under HDMI will appear on the display and the audio will support PCM2ch.  
B. By pushing both Audio & Video buttons the output will switch to XGA.  
C. By pushing both Audio & Timing buttons the output will switch to 720p.

## 7. Specifications

Input ports	1 x PC 1 x DVI-D 1 x Coaxial/Audio 1 x L/R Audio
Output port	1 x HDMI
Power Supply	5V/1A DC (US/EU standards, CE/FCC/UL certified)
Dimensions (mm)	160(D) x 102(W) x 25(H)
Weight(g)	332
Chassis Material	Aluminum
Silk Skin Color	Silver
Operating Temperature	Operating from 0°C ~ 40°C
Power Consumption	3.5w

## 8. Connection and Installation

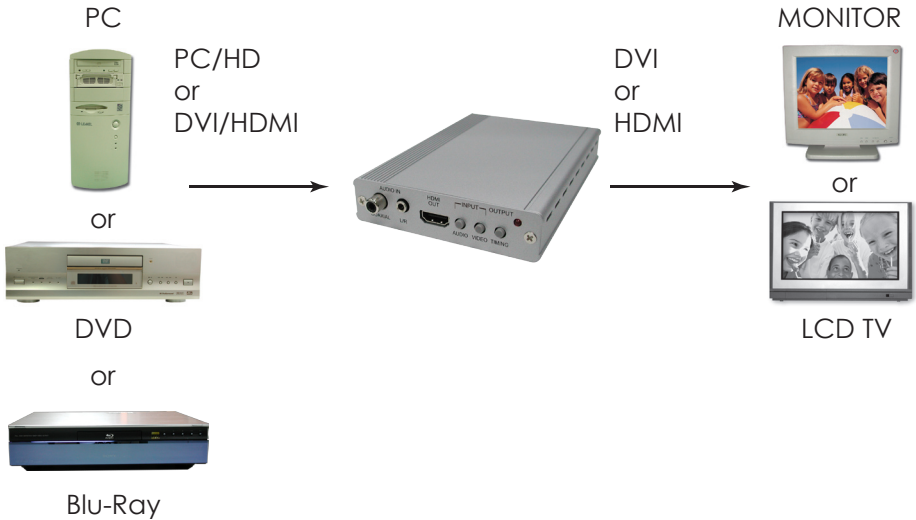

## 9. Support Resolution

Input		Output
Resolution	Vertical Rate	Resolution/Vertical Rate
VGA	60Hz	UXGA/60Hz XGA/60Hz 720P/60Hz 1080P/60Hz
SVGA		
XGA		
SXGA		
WXGA		
UXGA		
WSXGA		
WUXGA		
480i/480p		
1080i		
1080p	50Hz	UXGA/50Hz (note 1) XGA/50Hz (note 1) 720P/50Hz 1080p/50Hz (note 2)
576i/576p		
720p		
1080i		
1080p		

**Note 1 :** This scaler doesn't support 50/60Hz frame rate conversion; therefore 50Hz PC resolutions may not be compatible with all displays.

**Note 2 :** The timing of 1080p 50Hz output signal is very critical; therefore it may not be compatible with all displays.



**CYPRESS TECHNOLOGY CO., LTD.**  
Home page: <http://www.cypress.com.tw>

20090110 MPM-CP290